

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: John Deryk WATERS et al.

Title: DETECTOR

Appl. No.: Unassigned

Filing Date: 10/31/2003

Examiner: Unassigned

Art Unit: Unassigned

CLAIM FOR CONVENTION PRIORITY

Commissioner for Patents
PO Box 1450
Alexandria, Virginia 22313-1450

Sir:

The benefit of the filing date of the following prior foreign application filed in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed.

In support of this claim, filed herewith is a certified copy of said original foreign application:

- Great Britain Patent Application No. 0227196.3 filed 11/21/2002.

Respectfully submitted,

Date: October 31, 2003

HEWLETT-PACKARD COMPANY
Customer Number: 22879

By



William T. Ellis
Attorney for Applicant
Registration No. 26,874
Telephone: (202) 672-5485
Facsimile: (202) 672-5399



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

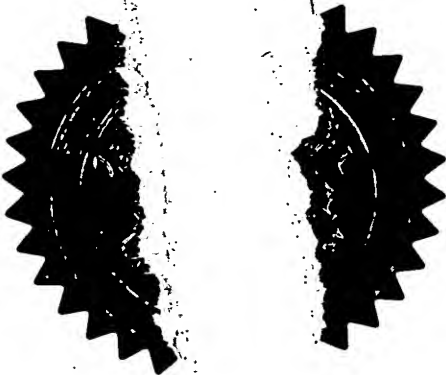

Signed

Dated 8 October 2003




21NOV02 E765309-1 001463
P01/7700 0.00-0227196.3

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

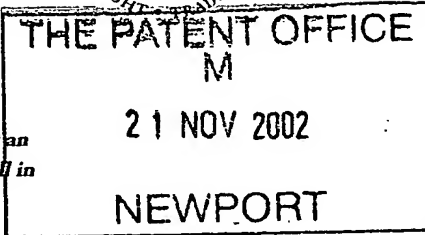

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference 300204381-1 GB

2. Patent application number
(The Patent Office will fill in this part) 0227196.3

21 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Hewlett-Packard Company
3000 Hanover Street
Palo Alto
CA 94304, USA

Patents ADP number (if you know it)

Delaware, USA

If the applicant is a corporate body, give the country/state of its incorporation

004965 88004

4. Title of the invention Detector

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Richard A. Lawrence
Hewlett-Packard Ltd, IP Section
Filton Road, Stoke Gifford
Bristol BS34 8QZ

Patents ADP number (if you know it)

0744 803 8001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	12	/
Claim(s)	4	/
Abstract	1	/
Drawing(s)	7	+ 7 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1 ✓
Request for preliminary examination and search (Patents Form 9/77)	1 ✓
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	

Fee Sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature

Richard A. Lawrence

Date

20/11/02

12. Name and daytime telephone number of person to contact in the United Kingdom

Meg Joyce Tel: 0117-312-9068

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Title: Detector

Field of the Invention

This invention relates to a detector for detecting the presence of a tag, a
5 read/write device, a read/write system and a method of detecting the presence
of a tag.

Background of the Invention

Memory tags in the form of Radio Frequency Identification (RFID)
tags are well known in the prior art, and the technology is well established (see
10 for example: RFID Handbook, Klaus Finkenzeller, 1999, John Wiley & Sons).
RFID tags come in many forms but all comprise an integrated circuit with
information stored on it and a coil which enables it to be interrogated by a
read/write device generally referred to as a reader. Until recently RFID tags
have been quite large, due to the frequency they operate at (13.56MHz) and the
15 size of coil they thus require, and have had very small storage capacities. Such
RFID tags have tended to be used in quite simple applications, such as for file
tracking within offices or in place of or in addition to bar codes for product
identification and supply chain management.

Much smaller RFID tags have also been developed, operating at
20 various frequencies. For example Hitachi-Maxell have developed "coil-on-
chip" technology in which the coil required for the inductive link is on the chip
rather than attached to it. This results in a memory tag in the form of a chip of
2.5mm square, which operates at 13.56MHz. In addition Hitachi has developed
a memory tag referred to as a "mu-chip" which is a chip of 0.4mm square and
25 operates at 2.45GHz. These smaller memory tags can be used in a variety of
different applications. Some are even available for the tagging of pets by
implantation.

Although it is known to provide tags with their own power source, in
many applications the tag is also powered by the radio frequency signal

generated by the reader. Such a known system is shown in Figure 1 where a reader is indicated generally at 10 and a tag at 12. The reader 10 comprises a radio-frequency signal generator 13 and a resonant circuit part 11, in the present example comprising an inductor 14 and a capacitor 15 connected in parallel.

- 5 The inductor 14 comprises a antenna. The resonant circuit part will have a particular resonant frequency in accordance with the capacitance and inductance of the capacitor 15 and the inductor 14, and the frequency signal generator 13 is operated to generate a signal at that resonant frequency.

- 10 The tag 12 similarly comprises a resonant circuit part generally illustrated at 16, a rectifying circuit part generally indicated at 17 and a memory 18. The resonant circuit part 16 comprises an inductor 19 which again comprises in this example a loop antenna, and a capacitor 20. The resonant circuit part 16 will thus have a resonant frequency set by the inductor 19 and capacitor 20. The resonant frequency of the resonant circuit part 16 is selected
15 to be the same as that of the reader 10. The rectifying part comprises a forward-biased diode 21 and a capacitor 22 and thus effectively acts as a half-wave rectifier.

- When the reader 10 is brought sufficiently close to the tag 12, a signal generated by the frequency generator 13 will cause the resonant circuit part 11
20 to generate a high frequency electromagnetic field. When the resonant circuit part 16 is moved within this field, a current will be caused to flow in the resonant circuit part 16, drawing power from the time varying magnetic field generated by the reader. The rectifying circuit part 17 will then serve to smooth the voltage across the resonant frequency part and provide a power supply
25 storage. The rectifying circuit part 17 is sufficient to supply a sufficiently stable voltage to the memory 18 for the memory to operate.

There are many uses to which such memory tags may be put. For example in EP 1 076 316 A2 an application is described whereby a memory tag

is attached to a print of a photograph and contains data about the print concerned.

For some uses the RFID tags are attached to the rear of sticky labels, which may be printed on the front with data, such as for example a bar code, or other product identifiers. Apparatus for applying RFID tags to the rear of labels is described in US 6,280,544 B1, where the front of the labels are printed and then the tags are applied to the rear. The apparatus further includes a read station down stream of the tag being applied to the rear of the label, where the operation of the tag is checked before the label is dispensed from the apparatus for use.

In such prior applications, the tag is easy to locate with a read/write device since the tag itself is physically large enough to be found, and/or is in a constant position, for example when applied to a label, and in many cases the range of the read/write head is sufficiently large, for example tens of centimetres at least. Where the tag is miniaturised and of comparatively low power however, a problem then arises in locating a read/write device sufficiently close to the tag for reading and/or writing of data to or from the tag to occur. An aim of the invention is to reduce or overcome the above problem.

20 Summary of the Invention

According to one aspect of the invention, we provide a detector for detecting the presence of a memory tag, the detector comprising a radio frequency source operable to generate a radio frequency signal and a detector resonant circuit part connected to the radio frequency source, the detector resonant circuit part comprising an antenna, the detector further comprising a power monitor responsive to the power of a reflected signal returned from the detector resonant circuit part, the power monitor being operable to generate an output in response to the power of the reflected signal, wherein a decrease in

the power of the reflected signal indicates the presence of a tag in the vicinity of the antenna.

The power monitor may be operable to generate an output when the power level falls below a threshold.

5 The power monitor may be operable to generate an output indicating the power of the reflected signal.

The position processor may be operable to receive position information indicating the position of the detector and an output from the power monitor, the position monitor being operable to store position information relating to at
10 least one position and the power monitor output at that position, and generate a recommended position output depending on the store position information and power monitor output information.

According to a second aspect of the invention, we provide a read/write device for reading and/or writing data to a tag, the read/write device comprising
15 a detector according to any one of claims 1 to 4, the read/write device being operable to read data from and/or write data to the tag in response to the power monitor output.

The read/write system may comprise a detector and a movable head may be provided with the antenna; the read/write system may be operable to move
20 the movable head and generate position information corresponding to the position of the movable head, the read/write system further may be operable to transmit the position information to the detector, receive a recommended position output from the detector and move the movable head to a position indicated by the recommended position output.

25 The read/write system may be operable to read data from and/or write data to the tag when the movable head is at the position indicated by the recommended position information.

The read/write system may comprise a printer, wherein the movable head may comprise a print head and wherein the printer is operable to print on a base medium provided with at least one tag.

According to a third aspect of the invention we provide a printer
5 operable to print on a base medium provided with at least one tag, the printer comprising a detector for detecting the presence of a memory tag, the detector comprising a radio frequency source operable to generate a radio frequency signal and a detector resonant circuit part connected to the radio frequency source, the detector resonant circuit part comprising an antenna, the detector
10 further comprising a power monitor responsive to the power of a reflected signal returned from the detector resonant circuit part, the power monitor being operable to generate an output in response to the power of the reflected signal, wherein a decrease in the power of the reflected signal indicates the presence of a tag in the vicinity of the antenna.

15 The printer may be operable to read data from and/or write data to the tag in response to the power monitor output.

The printer may have a movable print head, where the print head may be provided with the antenna, the printer being operable to move the movable head and generate position information corresponding to the position of the movable
20 head, the printer further being operable to transmit the position information to the detector, receive a recommended position output from the detector and move the movable head to a position indicated by the recommended position output.

According to a fourth aspect of the invention, we provide a method for
25 detecting the presence of a tag, comprising transmitting a signal to a resonant circuit part comprising an antenna, monitoring the power of a reflected signal reflected from the resonant circuit part, wherein a decrease in the power of the reflected signal indicates the presence of a tag in the vicinity of the antenna.

The method may comprise the step of moving a detector provided with the antenna relative to the tag, storing position information relating to the position of the detector and power information related to the power reflected signal at that position, and generating a recommended position in accordance with store information.

Brief Description of the Drawings

An embodiment of the present invention will now be described by way of example only with reference to the accompanying drawings wherein;

Figure 1 is a circuit diagram of a known read/write device and tag,

Figure 2a is a diagrammatic illustration of a read/write device embodying the present invention in the absence of a tag,

Figure 2b is a diagrammatic illustration of a read/write device embodying the present invention in the presence of a tag,

Figure 3 is a diagrammatic illustration of a particular implementation of a read/write device and tag embodying the present invention,

Figure 4 is a diagrammatic illustration of a read/write system comprising a printer embodying the present invention,

Figure 5 is a flow diagram illustrating a method embodying the present invention, and

Figure 6 is a diagrammatic illustration of a further read/write system embodying the present invention.

Detailed Description of the Preferred Embodiments

Referring now to Figures 2a and 2b, a detector embodying the present invention is shown generally at 23. The detector 23 in like manner to the reader of Figure 1 comprises a resonant circuit part 11' comprising a capacitor 13' and an inductor 14'. In this example, the inductor 14' comprises an antenna. Connected to the resonant circuit part 11' is a signal generator 13' operable to supply a signal at a desired frequency to the resonant circuit part 11'.

To monitor the power reflected by the resonant circuit part 11, a coupler 24 is provided connected to a power monitor 25. When no tag is within the vicinity of the inductive part 14', the signal generated by the frequency source 13' will be reflected by the resonant circuit part 11. A part of this reflected
 5 signal will be split off by the coupler 15 and directed to the power monitor 25.

A tag is shown at 12 identical to that of Figure 1. The tag 12 simply comprises a tag resonant circuit part 16 and a rectifying circuit part 17 to supply power to a memory 18. The resonant circuit parts 11', 16 are tuned to have generally the same resonant frequency. When the tag 12 is sufficiently close to
 10 the inductor 14' such that there is inductive coupling between the resonant circuit parts 11', 16, the resonant circuit part 16 will draw power from the magnetic field of the inductor, and the resulting signal is rectified by the rectifying circuit part 17 to power the memory 18.

When the tag 12 is brought in the vicinity of the inductor 14' as shown
 15 in Figure 2b the inductive coupling between the resonant circuit part 11' and the tag resonant circuit part 16 will draw power from the detector 23, causing a reduction in the power of the signal reflected by the resonant circuit part 11'. This fall will be detected by the power monitor 25 as shown diagrammatically in Figure 2b. Thus, by detecting the fall in the power of the reflected signal, the
 20 presence of a tag may be inferred.

A detector as shown in Figures 2a and 2b may advantageously be incorporated in a read/write device operable to retrieve data from and/or write data to a tag.

Referring now to Figure 3, a memory tag embodying the present
 25 invention is shown at 30 and a read/write device shown at 31. The tag 30 comprises a resonant circuit part 32 and a rectifying circuit part 33, together with a memory 18. The resonant circuit part 32 comprises an inductor L2 35 and a capacitor C2 36 connected in parallel in like manner to the tag 12 of Figure 1, Figure 2b. The resonant circuit part 32 further comprises a

controllable capacitive element generally indicated at 37, in the example of Figure 3 comprising a capacitor C3 38 and a switch S1 39 which is connected to a read data line 39a connected to the memory 36 to modulate the resonant frequency of the resonant circuit part 32. The rectifying part 33 comprises a diode D1 40 connected to the resonant circuit part 32 in a forward biased direction and a capacitor C4 41 connected in parallel with the components of the resonant circuit part 32. The rectifying circuit part 33 operates in like manner to the rectifying circuit part 17 of Figure 1 as a half-wave rectifier to provide power to the memory 18. The tag 30 further comprises a write data circuit part 42. The write data circuit part 42 comprises a diode D2 43 connected in the forward bias direction to the output of the resonant circuit part 32, with a capacitor C5 44 and a resistor R1 46 connected in parallel with the components of the resonant circuit part 32. The write data circuit part 42 thus in this embodiment comprises a simple envelope detector which is responsive to the magnitude of the signal generated by the resonant circuit part 32, and provides a write data signal on a line 47 to the memory 18.

The read/write device 31 in like manner to the detector 23 comprises a resonant circuit part 50 which comprises an inductor L1 51 and a capacitor C1 54 connected in parallel. A frequency generator 53 is connected to the resonant circuit part 50. The read/write device 31 further comprises an amplitude modulator 54 which is controllable in response to data sent on a write data line 55. The amplitude modulator 54 controls the power of the signal from the frequency generator 53 to the resonant circuit part 50, and thus provides modulation of the amplitude of the power of the signal generated by the resonant circuit part 32 which can be detected by the right data circuit part 42 of the tag 30.

The read/write device 31 further comprises a demodulator, generally shown at 56. The demodulator 46 comprises a splitter 57 connected to the frequency generator 45 to split off a part of the signal to provide a reference

signal. A coupler 58 is provided to split off a part of the reflected signal reflected back from the resonant circuit part 50. The reference signal and reflected signal are passed to a multiplier indicated at 59. The multiplier 59 multiplies the reflected signal and the reference signal and passes the output to a low pass filter 60. The low pass filter 60 passes a signal corresponding to the phase difference between the reference signal and the reflected signal to an output 61. By controlling the switch S1 39 of the tag 30 under control of the memory 34, the resonant frequency of resonant circuit part 32 can be modulated and hence the phase of the reflected signal reflected by the resonant circuit part 50 with respect to a reference signal can be modulated. This change of phase is detected by the demodulator 55, and so data can be read from the tag by the read/write device 31. By this method, data may be transmitted from the tag 30 whilst not significantly affecting the power drawn by the resonant circuit part 32.

A power monitor 62 is provided connected to the coupler 57 in like manner to the coupler 24 of Figure 2a. Because, as described hereinbefore, the tag 30 is operable to provide a modulated signal to the read/write device without significantly varying the power drawn by the resonant circuit part 32, the amplitude of the reflected signal from the resonant circuit part 50 will be primarily dependant on the power drawn by the tag 30 and be independent of the modulation of the reflected signal by operation of switch S1. Thus, the power monitor 62 is operable to detect the presence of a tag 30 adjacent to the read/write device 31 by detecting a drop in the power in the signal reflected by the resonant circuit part 50. The power monitor may be implemented in a relatively simple fashion, for example by providing a simple rectifier similar to the rectifying circuit part 33 of the tag 30, to provide an output signal 62 comprising, in this example, a simple voltage. An output is provided to a position processor shown at 63, which in Figure 3 is shown as part of the

read/write device 31 which it is apparent may be provided on any other device or element as appropriate.

The read/write device 31 of Figure 3 may be used in an appropriate application as desired. For example, as shown with reference to Figure 4, a printer is shown schematically at 70 provided with means to handle and print on a base medium for example a roller shown diagrammatically at 71 and a print head 72 movable on a track 73. The printer 70 is operable to receive a suitable flexible base medium, in this example a sheet of paper 74, provided with a plurality of tags 30 distributed over the paper 74. In this example, the print head 72 is provided with a read/write device 31, and the inductor 51 comprises a loop antenna projecting from the print head 72. The printer comprises a printer controller 75 provided with an external connection 76, for example to a computer to receive data to be printed. The printer controller 75 is operable to control the rollers 71 to feed the paper sheet 74, and also to move the print head 72 along the track 73 and instruct the print head 72 to print on the paper 34.

In this embodiment, the printer controller 75 will be aware of the position of the paper sheet 74 by virtue of operation of the roller assembly 71 and also knows the position of the print head 72 on the track 73. This information is provided to the position processor 63, which will therefore know the position of the antenna 51 relative to the sheet of paper 74, and will also receive the output signal 63 from the power monitor 62 at that position. As seen in Figure 5, the position processor will then be able to perform the method of, at step 80, receiving the position information, in this example the print head position 32 and also the position of the paper. At step 81, the processor 63 will receive the power level information, that is the power signal 63 received from the position monitor 62. As shown at step 82, the position processor can repeat the process as necessary, storing information as shown at step 83. The print head 72 or paper 74 may then be moved at step 84, for example by the position processor sending an output on line 65 to the printing controller 75 or otherwise

as desired. When the position processor 64 has sufficient information, it may generate a recommended position output indicating an appropriate position of a tag 30.

5 The method of Figure 5 may be implemented as desired, further to provide a good as coupling as possible between the read/write device 31 and a tag 30, or to provide a simple criteria as desired or otherwise. For example, it will be apparent that by performing the steps of the method of Figure 5 repeatedly, moving the print head and paper 84 as necessary, a two-dimensional "map" of the sheet of paper 74 may be built of where the position of tags 30 is indicated by minima in the power of the signal reflected from the resonant circuit part 50. Since the position of each of the minima corresponding to a tag will be known, by sending the appropriate instructions to the printer controller 75 the roller 71 and the print head 72 may be moved to position the antenna 51 directly over a tag 30 as desired. In a more simple implementation, the position processor 63 will simply detect when the power of the reflected signal falls below a given level, indicating that the tag 30 is sufficiently close to the antenna 51 to provide a sufficient inductive coupling, without necessarily taking further steps to identify the position of the tag 30. This might be applicable for circumstances where the print head 72 is repeatedly scanned across the paper 74 in successive lines, and data is written to be read from the tag 30 on each successive pass during the period when the reflected power signal is below a threshold. In this case, the step of storing the position and power information may be omitted, or the position and power information may be stored to allow the tag 30 to be relocated if desired.

25 As shown in Figure 6, an alternative read/write device 70' comprising a printer is shown comprising an arm 80 provided with a plurality of detectors 81 similar to the detector 23 each operable to scan a part of the base medium, in this example paper 74' as passes under the plurality of detectors 81 and provide an output accordingly to the printer controller 75'. This embodiment is

particularly suitable for use in a read/write device such as a printer which does not have a scanning print head.

In a yet further read/write system embodying the invention, a read/write system comprising a wand 90 is shown in Figure 7, which may be manually positioned to attach a tag 30 on a sheet of paper 74, for example by a user touching the wand 90 to a printed mark. The wand 90 may comprise a simple detector as shown in Figures 2a and 2b, with a connection 92, for example for connection to a computer, or may be provided with some or all of the functionality of the read/write device 31 and its own internal memory to be able to operate without any such connection 92.

The wand 90 is provided with an antenna such as the antenna 51 of Figure 3, at its tip 91.

In the present specification "comprise" means "includes or consists of" and "comprising" means "including or consisting of".

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

CLAIMS

1. A detector for detecting the presence of a memory tag, the detector
5 comprising a radio frequency source operable to generate a radio frequency
signal and a detector resonant circuit part connected to the radio frequency
source, the detector resonant circuit part comprising an antenna,
the detector further comprising a power monitor responsive to the power
of a reflected signal returned from the detector resonant circuit part,
10 the power monitor being operable to generate an output in response to
the power of the reflected signal,
wherein a decrease in the power of the reflected signal indicates the
presence of a tag in the vicinity of the antenna.
- 15 2. A detector according to claim 1 wherein the power monitor is operable
to generate an output when the power level falls below a threshold.
3. A detector according to claim 1 wherein the power monitor is operable
to generate an output indicating the power of the reflected signal.
- 20 4. A detector according to any one of claims 1 to 3 comprising a position
processor, the position processor being operable to receive position information
indicating the position of the detector and an output from the power monitor,
the position monitor being operable to store position information relating to at
25 least one position and the power monitor output at that position, and generate a
recommended position output depending on the store position information and
power monitor output information.

5. A read/write device for reading and/or writing data to a tag, the read/write device comprising a detector according to any one of claims 1 to 4, the read/write device being operable to read data from and/or write data to the tag in response to the power monitor output.

5

6. A read/write system comprising a detector according to claim 4 and a movable head provided with the antenna, the read/write system being operable to move the movable head and generate position information corresponding to the position of the movable head, the read/write system further being operable to transmit the position information to the detector, receive a recommended position output from the detector and move the movable head to a position indicated by the recommended position output.

15

7. A read/write system according to claim 6 wherein the read/write system is operable to read data from and/or write data to the tag when the movable head is at the position indicated by the recommended position information.

20

8. A read/write system according to claim 6 or claim 7 wherein the read/write system comprises a printer, wherein the movable head comprises a print head and wherein the printer is operable to print on a base medium provided with at least one tag.

25

9. A read/write system according to claim 5 comprising a plurality of detectors.

10. A read/write system substantially as described herein and/or with reference to the accompanying drawings.

11. A printer operable to print on a base medium provided with at least one tag, the printer comprising a detector for detecting the presence of a memory tag, the detector comprising a radio frequency source operable to generate a radio frequency signal and a detector resonant circuit part connected to the radio frequency source, the detector resonant circuit part comprising an antenna,

the detector further comprising a power monitor responsive to the power of a reflected signal returned from the detector resonant circuit part,

the power monitor being operable to generate an output in response to the power of the reflected signal,

wherein a decrease in the power of the reflected signal indicates the presence of a tag in the vicinity of the antenna.

12. A printer according to claim 11 wherein the printer is operable to read data from and/or write data to the tag in response to the power monitor output.

13. A printer according to claim 11 or claim 12 having a movable print head, the print head provided with the antenna, the printer being operable to move the movable head and generate position information corresponding to the position of the movable head, the printer further being operable to transmit the position information to the detector, receive a recommended position output from the detector and move the movable head to a position indicated by the recommended position output.

14. A printer substantially as described herein and/or with reference to the accompanying drawings.

15. A method for detecting the presence of a tag, comprising

transmitting a signal to a resonant circuit part comprising an antenna,
monitoring the power of a reflected signal reflected from the resonant circuit
part,

5 wherein a decrease in the power of the reflected signal indicates the
presence of a tag in the vicinity of the antenna.

16. A method according to claim 15 further comprising the step of moving a
detector provided with the antenna relative to the tag, storing position
information relating to the position of the detector and power information
10 related to the power reflected signal at that position, and generating a
recommended position in accordance with store information.

17. A method substantially as described herein and/or with reference to the
accompanying drawings.

15

18. Any novel feature or novel combination of features described herein
and/or in the accompanying drawings.

ABSTRACT

Title: Detector

- 5 A detector for detecting the presence of a memory tag, the detector comprising a radio frequency source operable to generate a radio frequency signal and a detector resonant circuit part connected to the radio frequency source, the detector resonant circuit part comprising an antenna,
- 10 the detector further comprising a power monitor responsive to the power of a reflected signal returned from the detector resonant circuit part,
- the power monitor being operable to generate an output in response to the power of the reflected signal,
- wherein a decrease in the power of the reflected signal indicates the presence of a tag in the vicinity of the antenna.



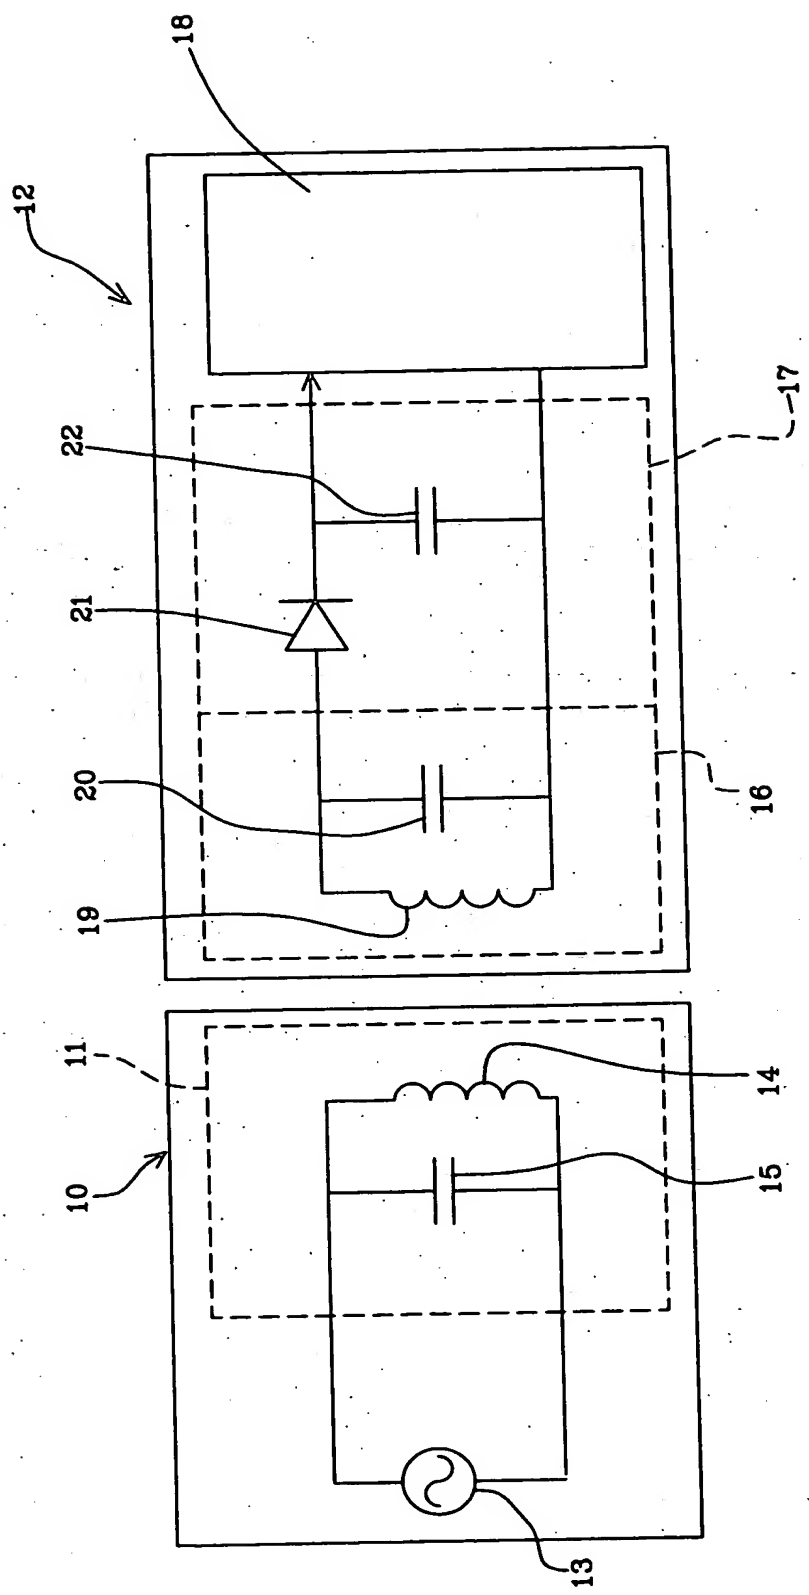


FIG. 1



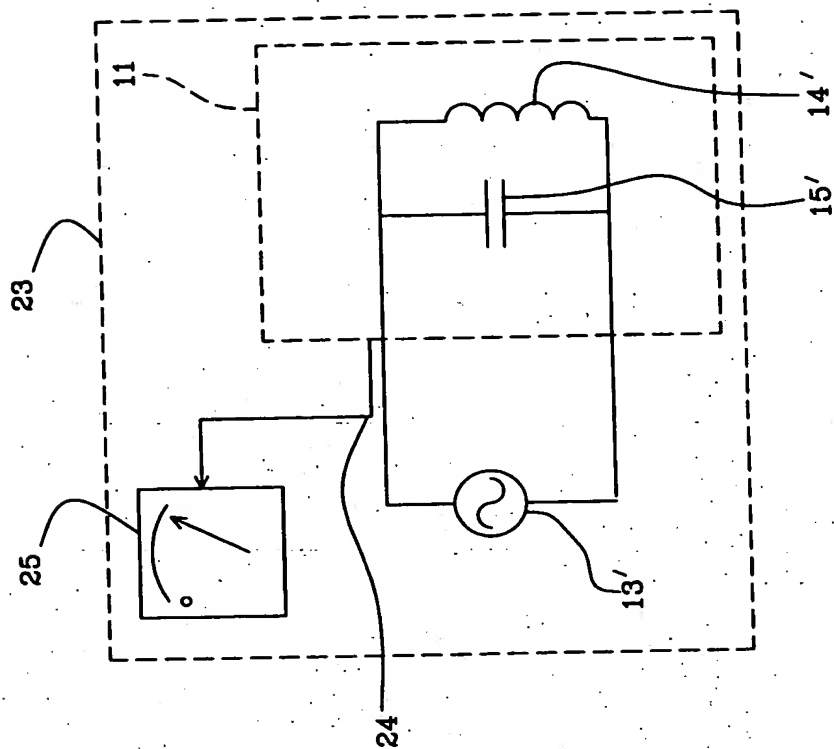


FIG. 28



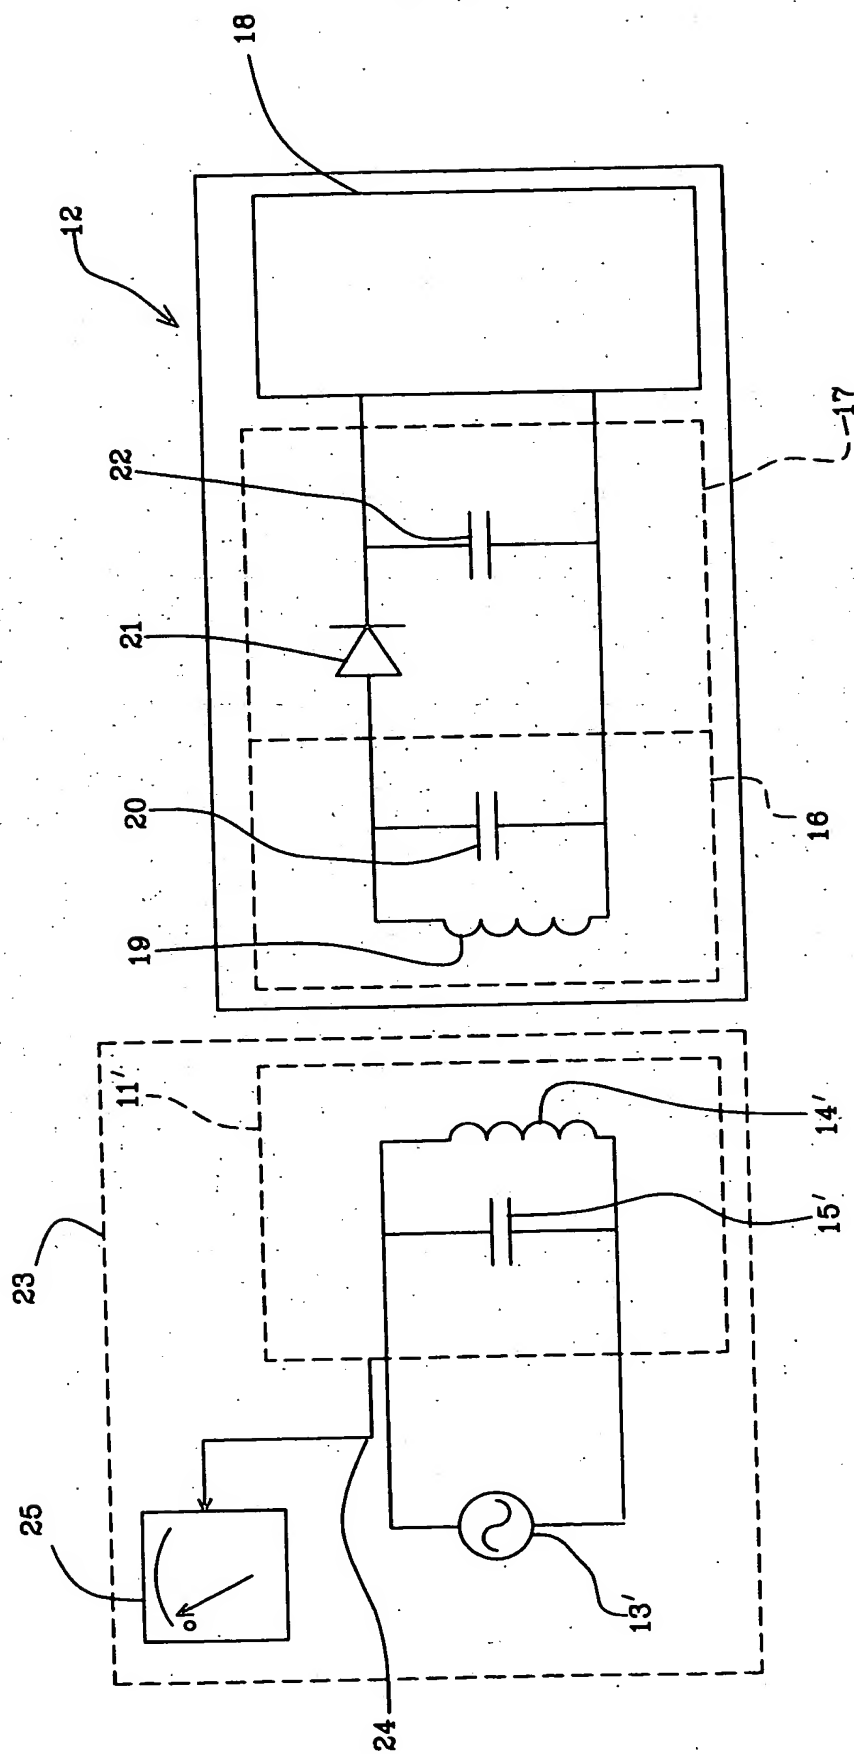
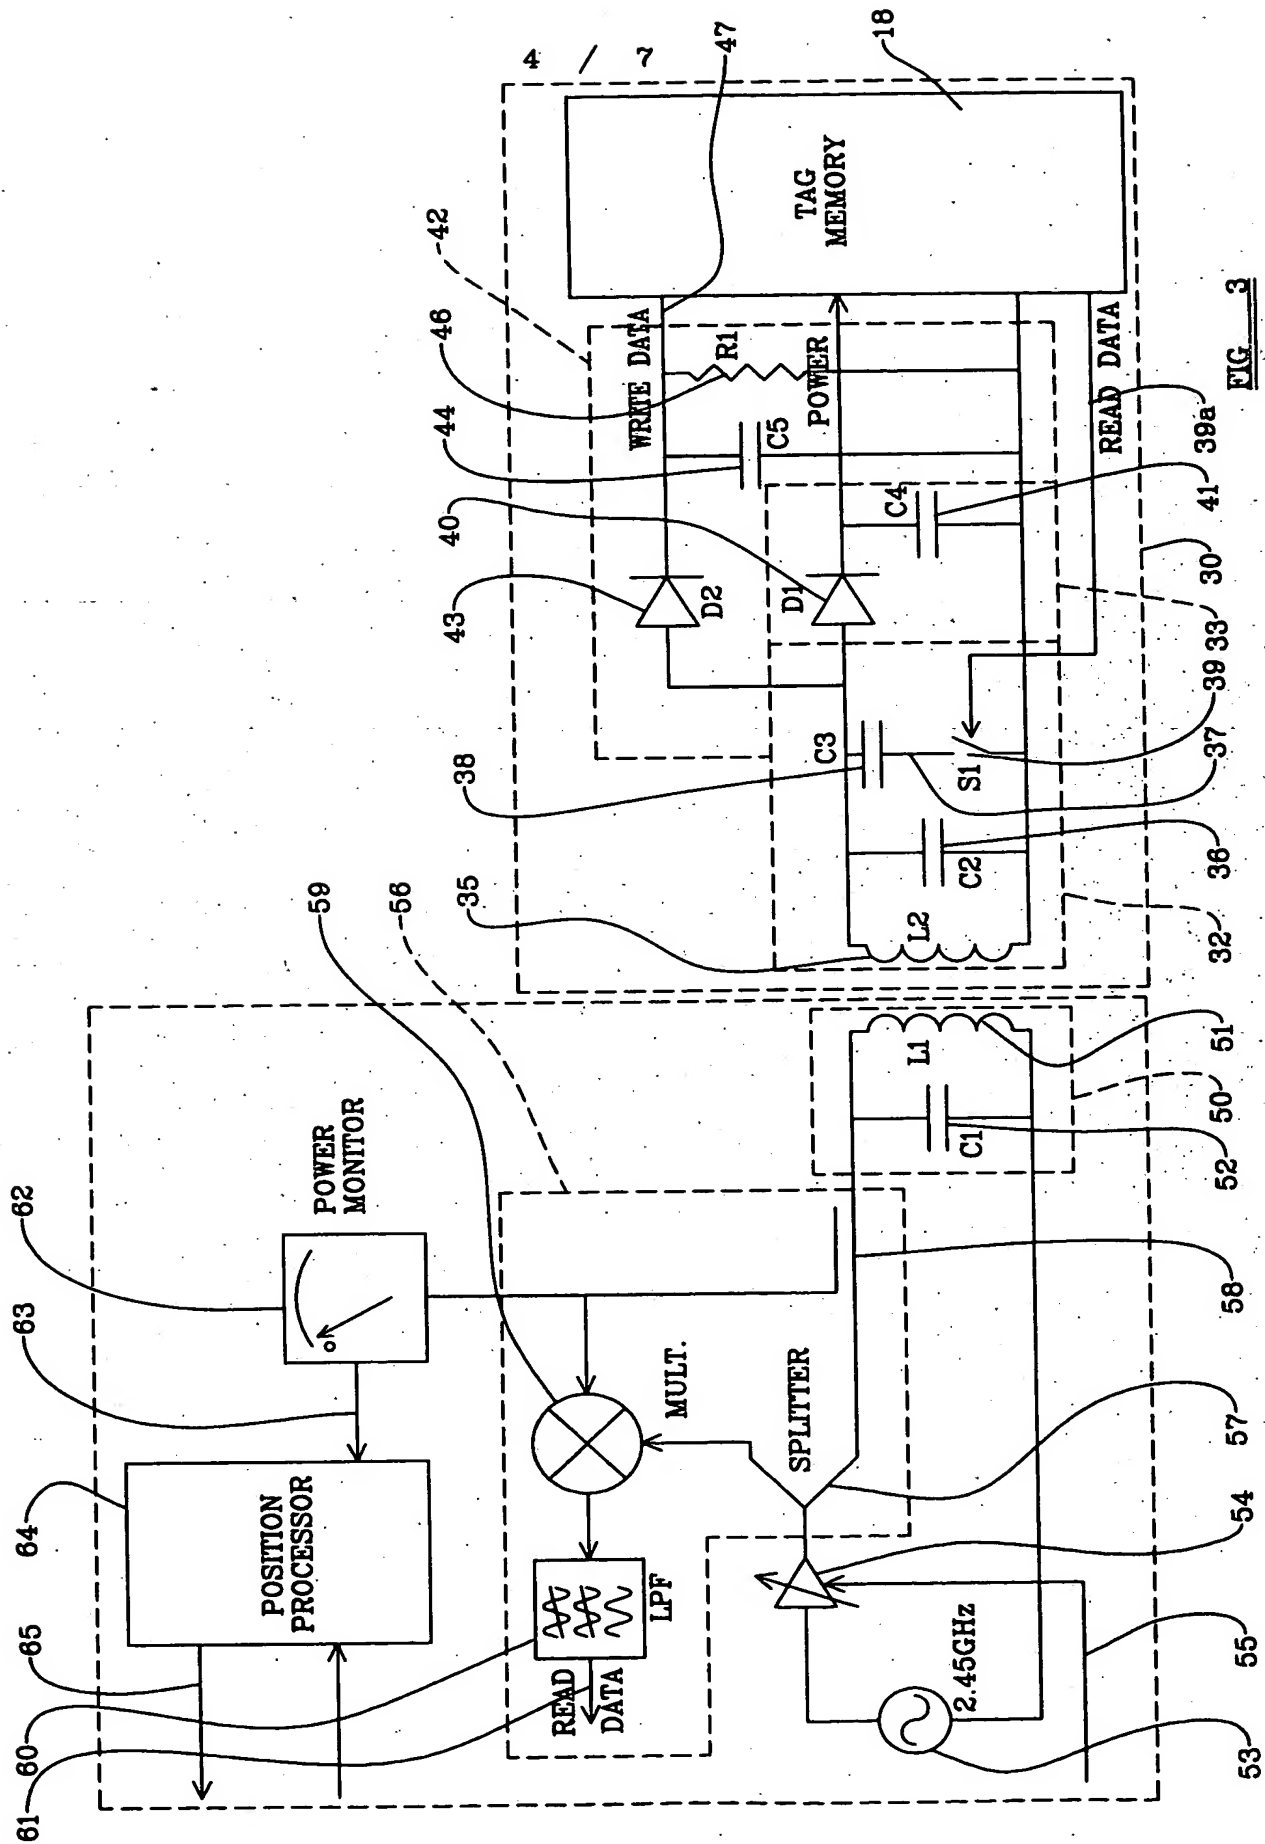


FIG 2b







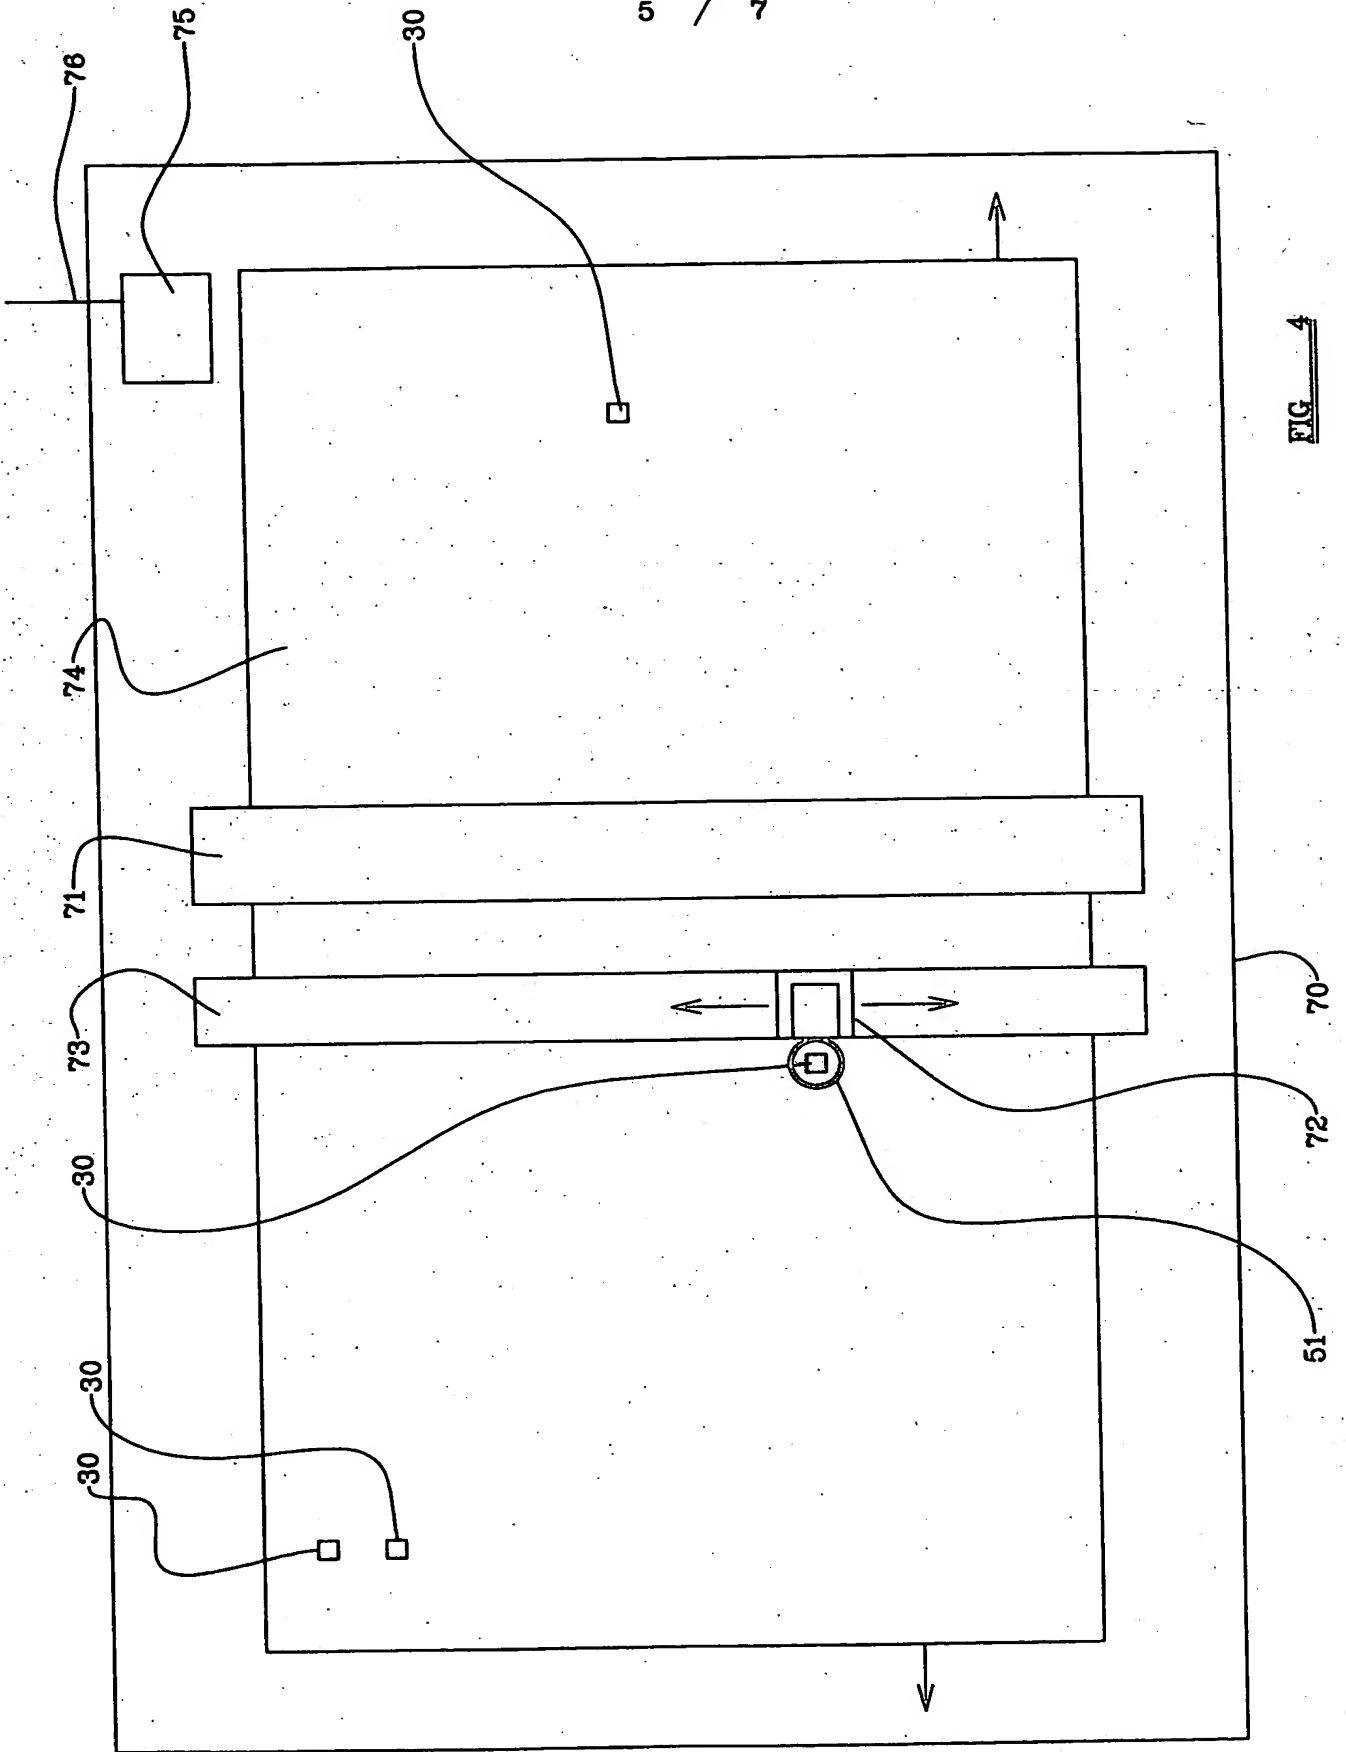


FIG 4



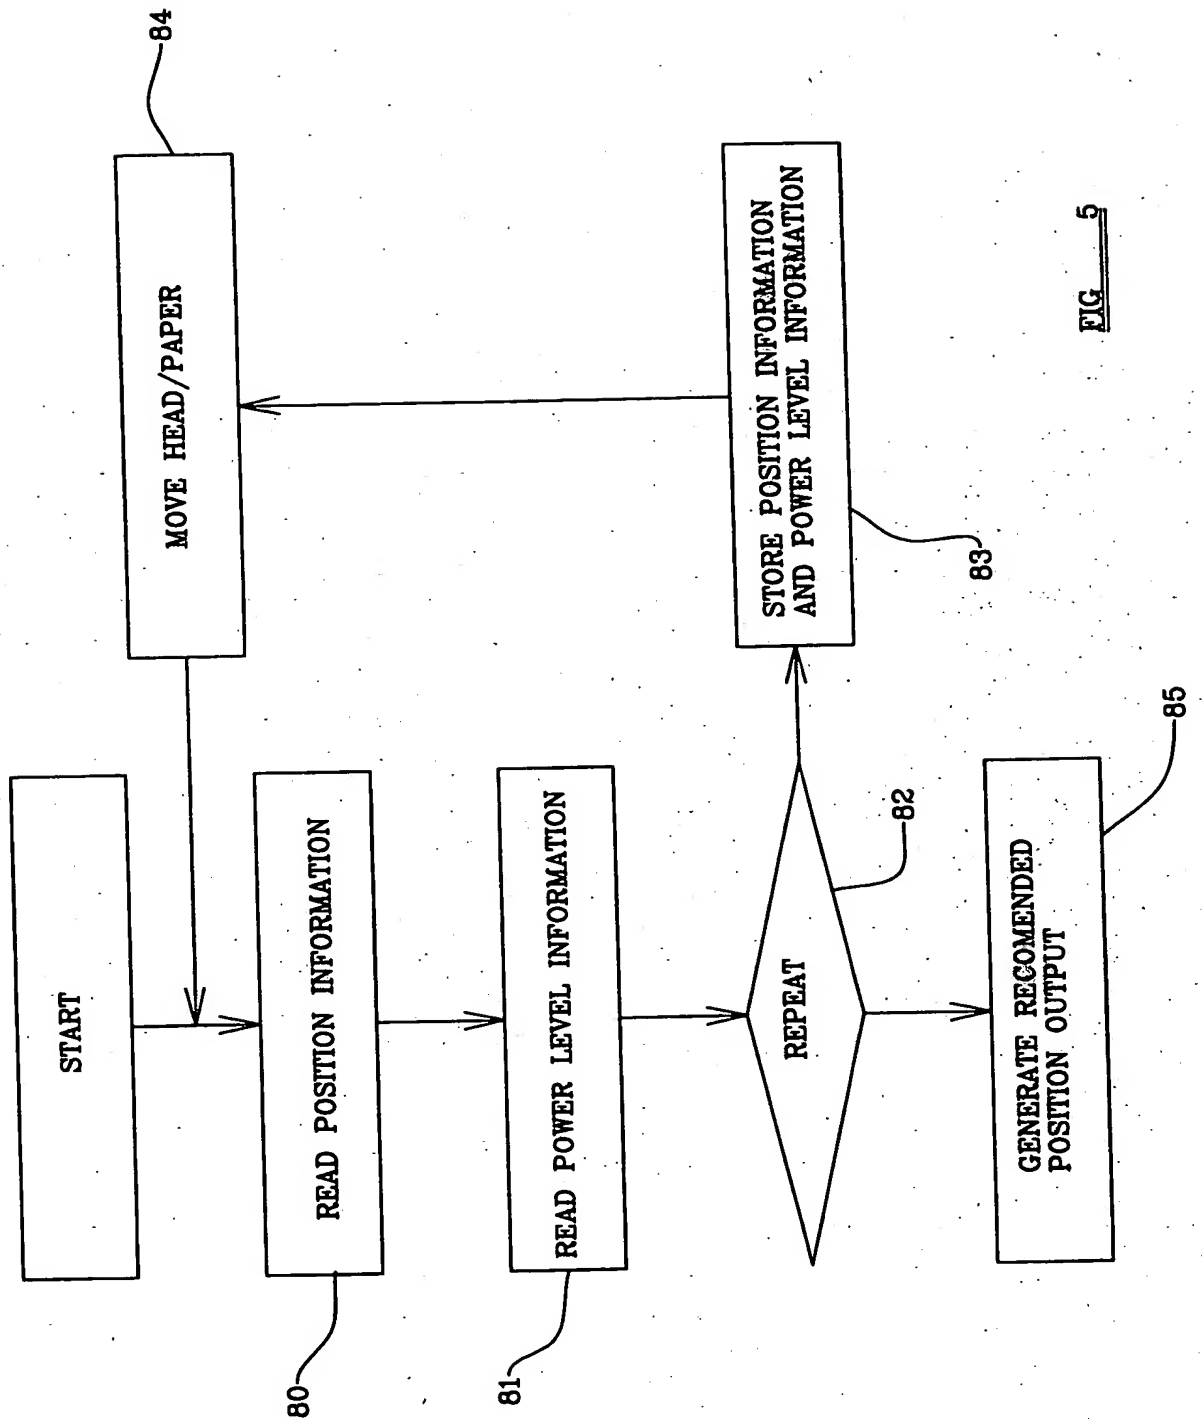


FIG 5



7 / 7

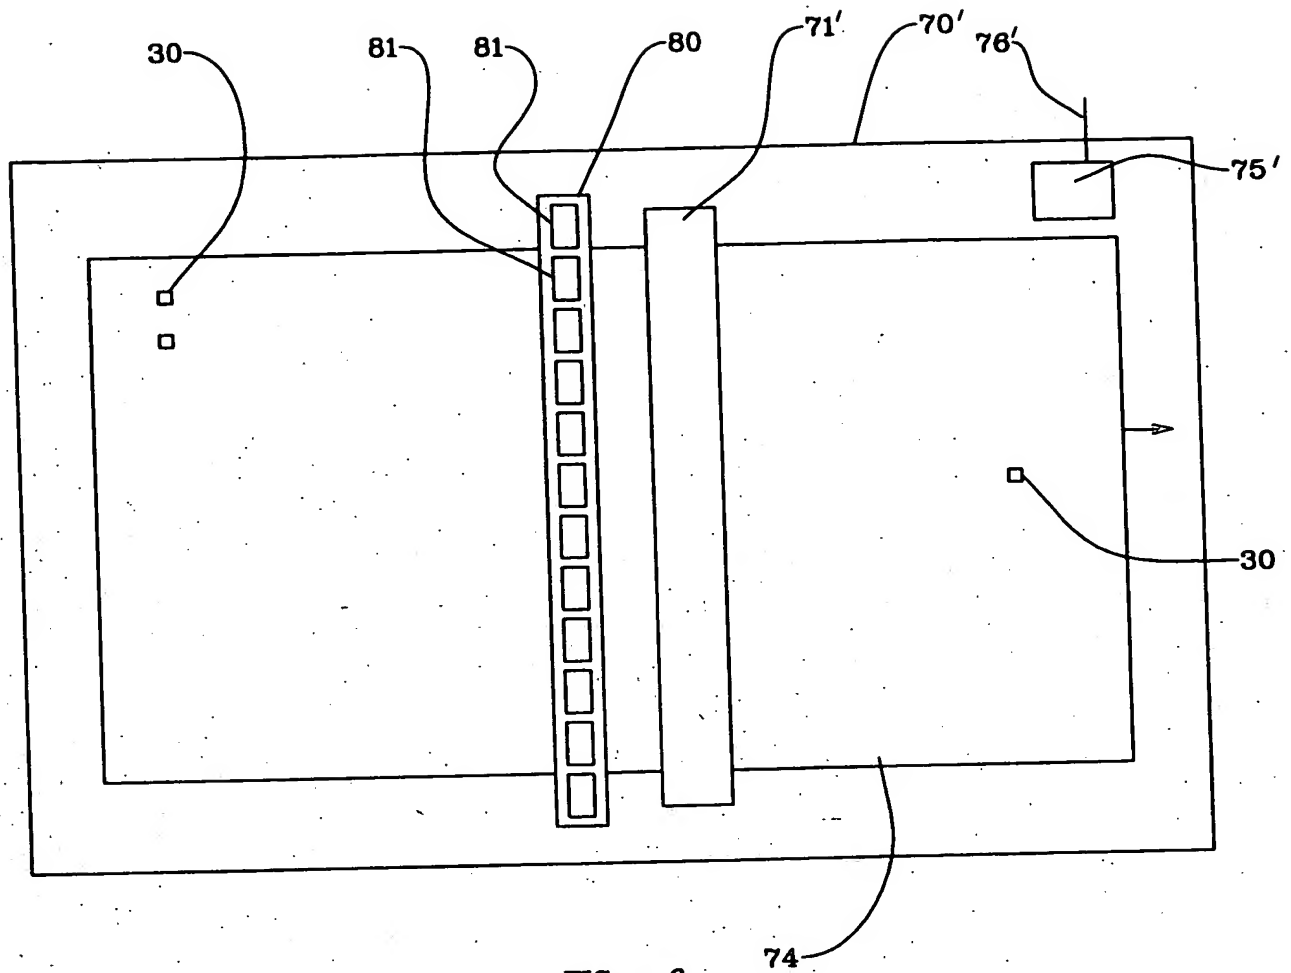


FIG 6

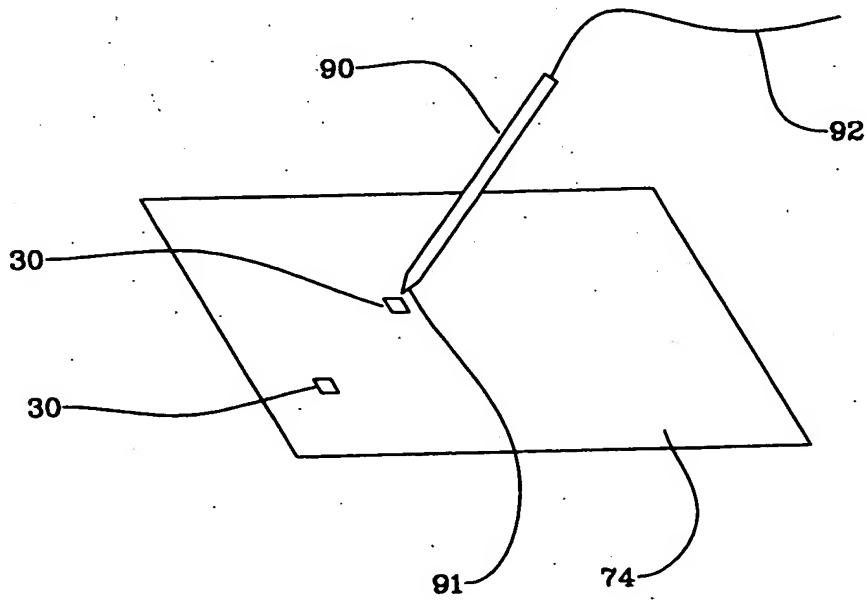


FIG 7

HEWLETT-PACKARD COMPANY
INTELLECTUAL PROPERTY ADMINISTRATION
P.O. BOX 272400
FORT COLLINS, COLORADO 80527-2400

300204381-2

John Deryk WATERS et al.